



ZEBRA

8000T Piggyback Clear Matte


FEATURES

- Thermal transfer, piggyback matte polyester label with a permanent acrylic adhesive
- Excellent print quality
- Special construction allows label to be printed and then laminated using the bottom clear portion
- Available in white top and clear bottom (05325RM)

MATERIAL CONSTRUCTION

Component	Description	Caliper
Facestock	White matte polyester	2.0 mil
Adhesive	Permanent, acrylic-based	0.9 mil
Facestock	Clear gloss polyester	1.5 mil
Adhesive	Permanent, acrylic-based	0.9 mil
Liner	50 lb. semi-bleached, kraft stock	3.2 mil
TOTAL ± 10%		8.5 mil

ADHESIVE STRENGTH

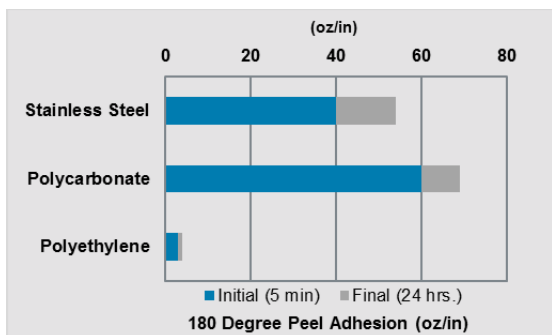

TEMPERATURE PERFORMANCE

Minimum Application Temperature	Service Temperature	Optimal Storage Conditions
50° F (10° C)	-40° F to 302° F (-40° C to 150° C)	72° F (22° C) at 50% RH

Expected Exterior Life







3 years

CHEMICAL RESISTANCE

Chemical	Suggested Ribbon			
	6000	2000	6100	
Weak	Blood	●	●	●
	Body Fluid	●	●	●
	Salt Water	●	●	●
	Water	●	●	●
	Window Cleaner	●	●	●
Moderate	Alcohol	●	●	●
	Ammonia	●	●	●
	Bleach	●	●	●
	IPA	●	●	●
Harsh	Gasoline	●	●	●
	Grease	●	●	●
	Oil	●	●	●
Extreme	Acetone	●	●	●
	IR Reflow	●	●	●
	MEK	●	●	●
	TCE	●	●	●
	Xylene	●	●	●

● Recommended ● Test in Your Application NR Not Recommended

SUGGESTED APPLICATIONS

- UL compliance product labeling

- Compliance labeling

- Labeling of packaging material including corrugate, plastic, and metal

- Product identification

- Automotive labeling

- Laboratory slide labeling


All products should be pre-tested to ensure it meets all intended requirements of specific end-use applications.

For more information, visit www.zebra.com/supplies

Product Performance and Suitability: The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.

NA and Corporate Headquarters | +1 800 423 0442 | inquiry4@zebra.com

©2018 ZIH Corp and/or its affiliates. All rights reserved. ZEBRA and the stylized Zebra head are trademarks of ZIH Corp, registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners.



ZEBRA

8000T Piggyback Clear Matte

UL/CSA Acceptances:

8000T Piggyback Clear Matte with 3200 ribbon is UL-recognized on selected surfaces

All products should be pre-tested to ensure it meets all intended requirements of specific end-use applications.

For more information, visit www.zebra.com/supplies

Product Performance and Suitability: The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.

NA and Corporate Headquarters | +1 800 423 0442 | inquiry4@zebra.com

©2018 ZIH Corp and/or its affiliates. All rights reserved. ZEBRA and the stylized Zebra head are trademarks of ZIH Corp, registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners.